





lamiere grecate per solaio

avanzato design e versatilità

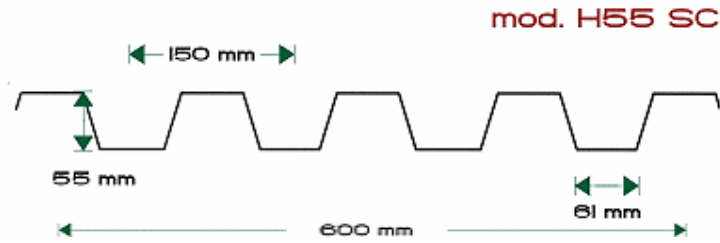

Lamiere grecate in acciaio zincato di vari spessori.

Particolarmente indicate per solai in cemento armato con funzione di cassaforma e sostegno della soletta di calcestruzzo.

CARATTERISTICHE STATICHE						
SPESSORE mm.	0,6	0,7	0,8	1,0	1,2	1,5
PESO Kg/m²	7,85	9,15	10,46	13,08	15,70	19,62
PESO Kg/m² 1000 1000	4,71	5,49	6,28	7,85	9,42	11,77
1250	5,88	6,86	7,85	9,81	11,77	14,71
1500	7,06	8,24	9,42	11,77	14,13	17,66
J cm⁴/m	41,76	51,16	59,89	78,23	96,83	122,74
W cm³/m	14,37	18,06	21,59	27,66	33,31	41,31



CARICO MASSIMO UNIFORMEMENTE DISTRIBUITO IN Kg/m²

Spess. mm																				
	Distanze fra gli appoggi in metri																			
	1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	3,75	4,00	4,25	4,50	4,75	5,00	5,50	6,00	
0,6	1600	1025	705	515	395	310	250	205	170	145	125	105	90	80	70	65	55	45	35	
						295	215	150	125	100	80	65	55	45	40	30	25	20	15	
0,7	2520	1615	1115	815	620	490	395	325	270	225	195	170	145	130	115	100	90	75	55	
						365	265	200	155	120	95	80	65	55	45	40	35	25	20	
0,8	2410	1540	1055	780	595	465	375	310	260	215	185	160	140	125	110	95	85	70	55	
						425	310	235	185	150	120	100	85	70	60	50	40	30	25	
1,0	3085	1975	1365	995	760	600	485	395	330	280	240	205	180	160	140	125	110	90	70	
						555	405	305	235	185	150	120	100	85	70	60	50	40	30	
1,2	3715	2375	1550	1200	915	720	580	475	400	335	285	250	215	190	170	150	135	110	85	
						690	500	375	290	230	185	150	125	100	85	75	65	45	35	
1,5	4605	2945	2035	1490	1140	890	720	590	495	415	355	310	270	235	210	185	165	135	105	
						870	635	480	370	290	230	190	155	130	110	95	80	60	45	
Freccia cm	0,24	0,37	0,53	0,71	0,94	1,18	1,45	1,74	2,04	2,40	2,78	3,08	3,42	3,87	4,25	4,90	5,20	6,10	6,72	

CARICO MASSIMO UNIFORMEMENTE DISTRIBUITO IN Kg/m²

Spess. mm																			
	Distanze fra gli appoggi in metri																		
	1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	3,75	4,00	4,50	4,75	5,00	5,50	6,00	4,50
0,6	2000	1280	880	645	495	390	315	255	215	180	155	130	115	100	90	80	70	55	45
									210	165	130	105	90	75	60	55	45	35	25
0,7	2520	1615	1115	815	620	490	395	325	270	225	195	170	145	130	115	100	90	75	55
									255	200	160	130	110	90	75	65	55	40	30
0,8	3015	1925	1320	975	745	580	470	390	325	270	230	200	175	155	140	120	105	90	70
									300	235	190	155	125	105	90	75	65	50	40
1,0	3855	2470	1705	1245	950	750	605	495	415	350	300	255	225	200	175	155	140	115	90
									390	305	245	200	165	140	115	100	85	65	50
1,2	4650	2970	1940	1500	1145	900	725	595	500	420	355	320	270	240	220	190	170	140	105
									485	380	305	250	205	170	145	120	105	80	60
1,5	5755	3680	2545	1865	1425	1115	900	740	620	520	445	390	340	295	265	230	205	170	130
									610	480	385	315	260	215	180	155	135	100	75
Freccia cm	0,18	0,28	0,40	0,54	0,71	0,89	1,09	1,30	1,55	1,78	2,07	2,28	2,62	2,90	3,28	3,62	3,89	4,48	5,19